

# CAN 75 TRACK SPOT

astro

## GENERAL

|                           |                            |
|---------------------------|----------------------------|
| CLASS:                    | CE (Class 1)               |
| IP RATING:                | IP20                       |
| BATHROOM ZONE:            | Zone 3                     |
| VOLTAGE:                  | Mains 230V                 |
| INSTALLATION ORIENTATION: | Track Mount - Ceiling Only |
| MAIN MATERIAL:            | Metal - Aluminium          |
| DIMENSIONS:               | H: 167mm W: 81mm Ø: 75mm   |
| CUT OUT HOLE:             | Not applicable             |
| RECESS DEPTH:             | Not applicable             |
| FIRE RATING:              | Not applicable             |
| CABLE LENGTH:             | Not applicable             |
| GROSS WEIGHT:             | 0.62Kg                     |

## LAMP

|                            |                |
|----------------------------|----------------|
| LIGHT SOURCE:              | LED MODULE     |
| MAXIMUM WATTAGE:           | 11.8W          |
| LAMP INCLUDED:             | Yes (Integral) |
| MAXIMUM LAMP LENGTH:       | Not applicable |
| LUMINOUS FLUX:             | 985.5 lm       |
| COLOUR TEMP:               | 3000K          |
| CRI:                       | 80             |
| R9:                        | 2.0            |
| MACADAM ELLIPSE:           | 3-Step         |
| TILT ADJUSTABLE ANGLE:     | 90°            |
| ROTATION ADJUSTABLE ANGLE: | 330°           |
| AVERAGE LIFESPAN:          | 40,000hrs      |
| L70:                       | >33,000hrs     |
| BEAM ANGLE:                | 27.8°          |

## ELECTRICAL

|                          |                      |
|--------------------------|----------------------|
| SWITCHED:                | No                   |
| DIMMABLE:                | Yes                  |
| DIMMING METHOD:          | Phase - Leading Edge |
| DRIVER INCLUDED:         | Yes (Integral)       |
| DRIVER OUTPUT CURRENT:   | Not applicable       |
| DRIVER OUTPUT VOLTAGE:   | Not applicable       |
| SUPPLY FREQUENCY:        | 50/60Hz              |
| DRIVER/BALLAST VOLTAGE:  | 210-250V             |
| DRIVER AVERAGE LIFESPAN: | 40,000hrs            |
| EFFICACY:                | 83.52lm/W            |

## ADDITIONAL INFORMATION




|                |                |
|----------------|----------------|
| SHADE INCLUDED | Not applicable |
| SHADE MATERIAL | Not applicable |



CODE: 6163  
SKU: 1396003  
FINISH: MATT WHITE



CODE: 6164  
SKU: 1396004  
FINISH: MATT BLACK

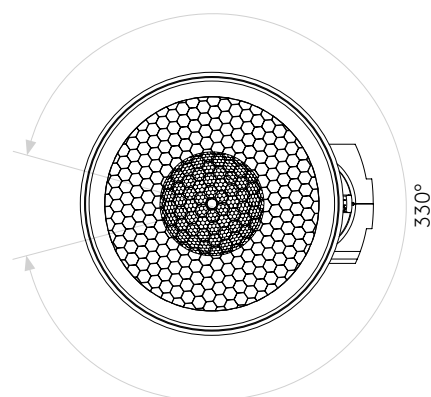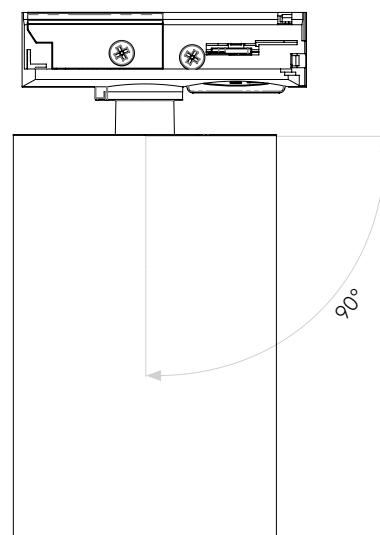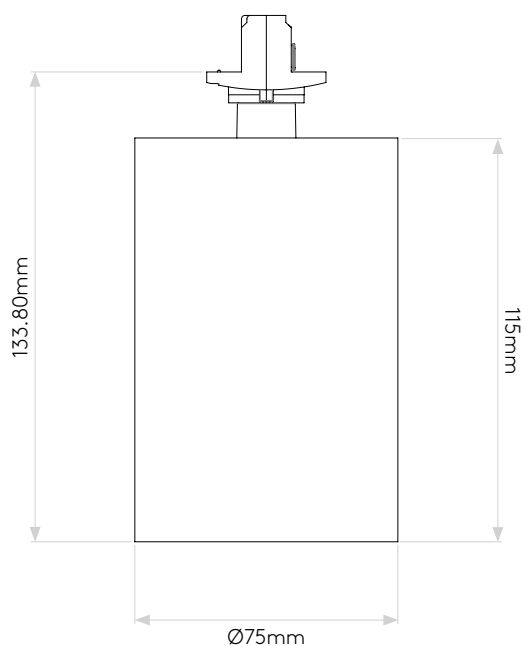

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.