

MONDRIAN 600 WALL 7885

SKU 1374002

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	Matt Nickel	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Aluminium	GROSS WEIGHT:	1.03 (Kg)
DIMENSIONS:	H: 50mm W: 600mm D: 183mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Horizontal	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:	LED Strip	MACADAM ELIPSE:	+/- 100K
MAXIMUM WATTAGE:	10.8W	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	To Be Advised
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	40 (Degrees)
LUMINOUS FLUX:	219.29 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	Not Applicable
CRI:	80	L70:	To Be Advised
R9:	-2.0		

ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	100 - 240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30000 (Hrs)
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	20.3 (lm/W)
DRIVER OUTPUT VOLTAGE:	12 (V)	DRIVER/BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION





Product tested with 1836 - LED Driver CC 250/350/500/700mA DALI Dim





BOX QUANTITY x 6



PRODUCT ELEVATIONS

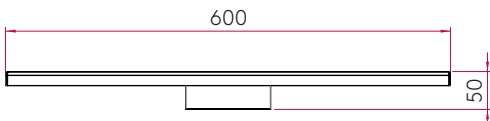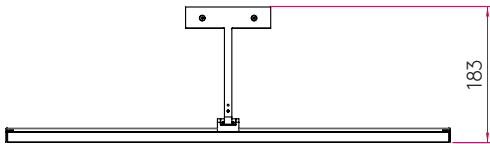

LUX DISTRIBUTION DIAGRAM

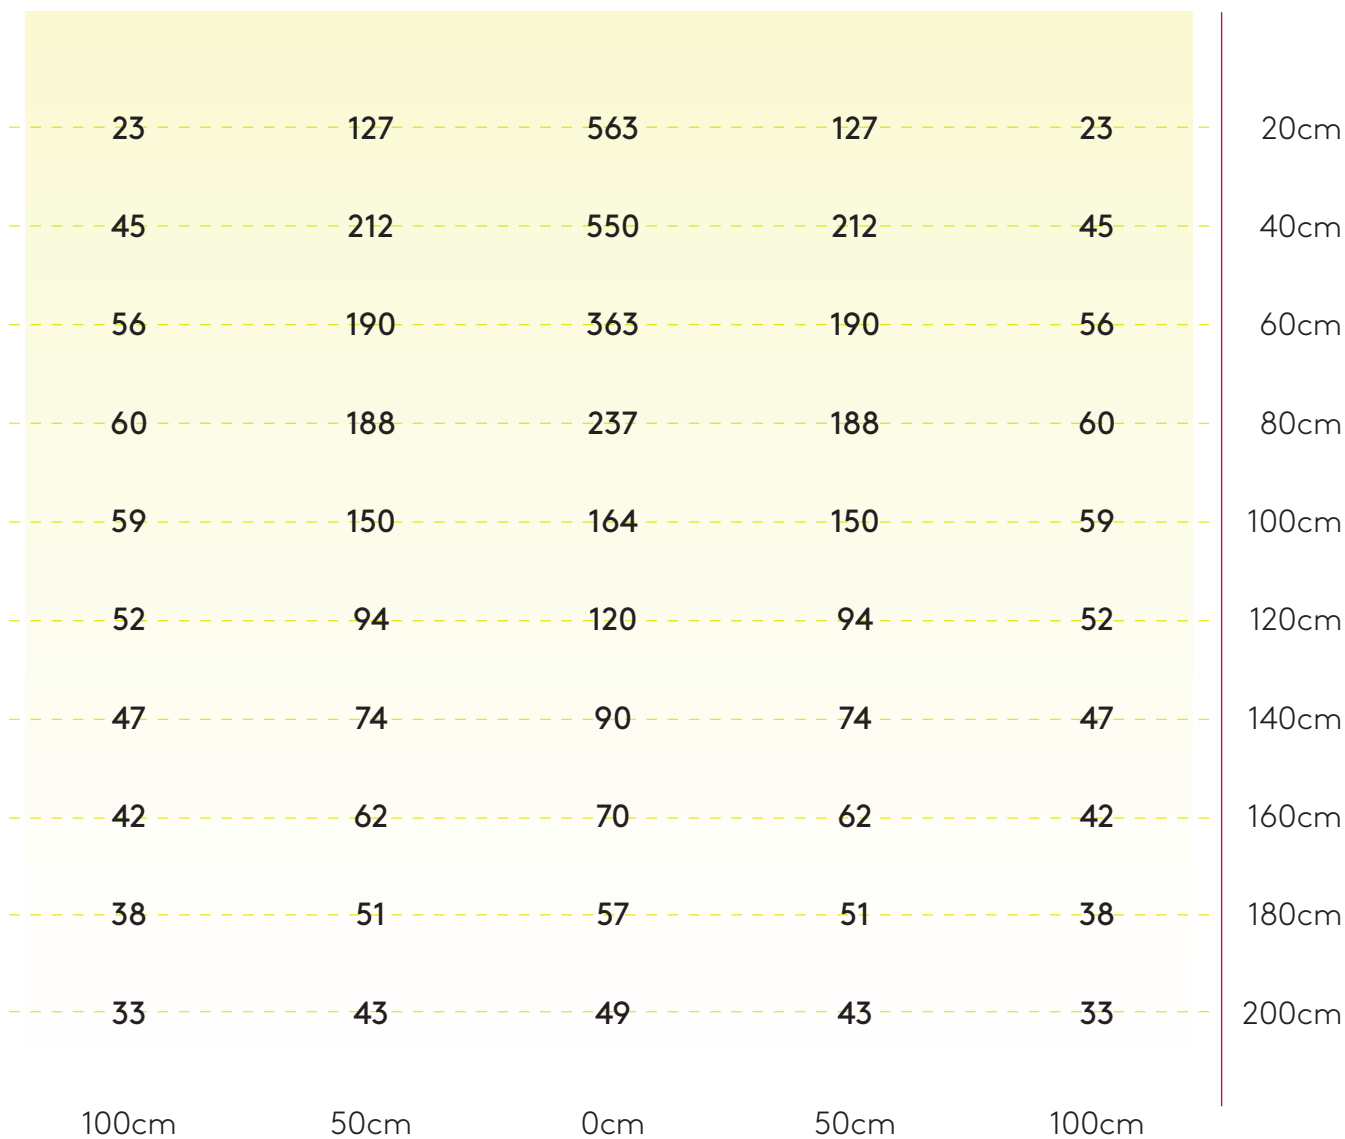

ADDITIONAL INFORMATION



All products tested were mounted 2m from the floor and adjustable heads set perpendicular to the ground. Results were obtained using a handheld lumen meter, measurements given are in Lux.

Please note: Graphical representation of the product is not to scale.