


KYOTO PENDANT 7031

SKU 1060004

astro

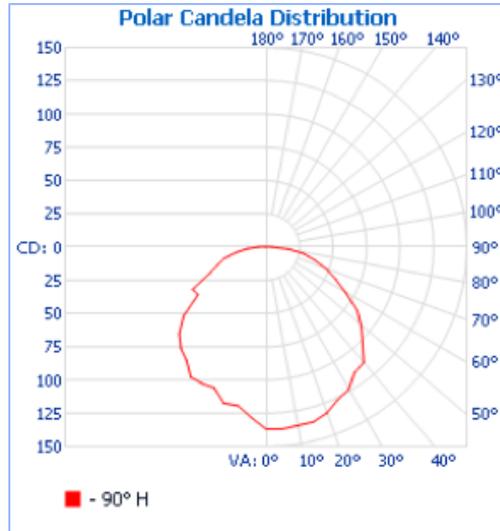

PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	750 (mm)
MAIN MATERIAL:	Metal - Mild Steel	GROSS WEIGHT:	2.64 (Kg)
DIMENSIONS:	D: 850-1150mm DIA: 75mm	CLASS:	CE (Class II)
INSTALLATION ORIENTATION:	Ceiling Mount	IP RATING:	IP44
CUT OUT HOLE:	51mm/2"	BATHROOM ZONE:	Zone 2, 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:	2G11	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	24W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	No	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	614.1 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	Lamp Dependent	AVERAGE LIFESPAN:	20,000 (Hrs)
CRI:	80	L70:	Not Applicable
R9:	-6.9		


ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	To Be Advised
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	29 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



This product is not suitable for use with a PIR motion detector.



BOX QUANTITY X4

PRODUCT ELEVATIONS

