MALLON LED 8002

astro

SKU 1125006



PRODUCT SPECIFICATION

GENERAL

FINISH: Bronze Effect CABLE LENGTH:

MAIN MATERIAL: Metal - Mild Steel GROSS WEIGHT:

DIMENSIONS: D: 60mm DIA: 330mm CLASS:

INISTALL ATION OPENITATION: Ceiling Mount

IN PATING:

2.8

CE (Class II) INSTALLATION ORIENTATION: Ceiling Mount IP RATING: IP44 Not Applicable **CUT OUT HOLE: BATHROOM ZONE:** Zone 2, 3 **RECESS DEPTH:** Not Applicable **VOLTAGE:** Mains 230V FIRE RATING: Not Applicable PRODUCT F MARK:

RE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:LED ModuleMACADAM ELIPSE:6 MacAdamMAXIMUM WATTAGE:16WUGR:Not ApplicableMAXIMUM LAMP LENGTH:Not ApplicableBEAM ANGLE:Not Applicable

LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 688.26 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable COLOUR TEMP: AVERAGE LIFESPAN: 2700 (K) 20,000 (Hrs) CRI: >80 L70: To Be Advised

ELECTRICAL

R9:

SWITCHED: Not Applicable SUPPLY FREQUENCY: 50/60 (Hz)

DIMMABLE: No DRIVER/BALLAST VOLTAGE: 220-240 (V)

DIMMING METHOD:Not ApplicableDRIVER AVERAGE LIFESPAN:20,000 switch cry (Hrs)DRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:42.7(Im/W)

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? Yes (Integral)

ADDITIONAL INFORMATION




BOX QUANTITY X4


CE

Not Applicable

3.05 (Kg)

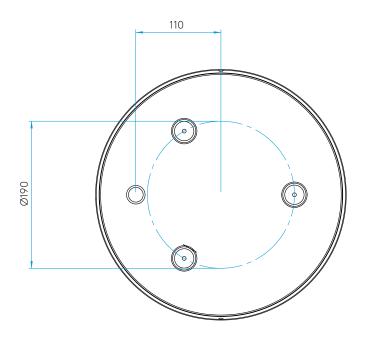



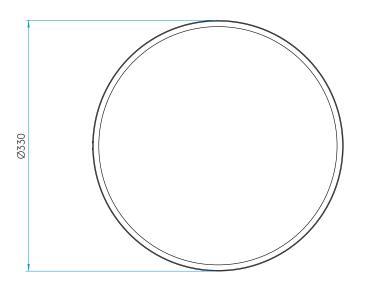

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com