VOID 100 5782

astro

SKU 1392011



PRODUCT SPECIFICATION

GENERAL

FINISH: Matt White CABLE LENGTH: 1000 (mm) MAIN MATERIAL: Metal - Aluminium **GROSS WEIGHT:** 1.362 (Kg) H:190mm DIA: 166mm **DIMENSIONS:** CLASS: CE (Class III) INSTALLATION ORIENTATION: Install in to new ceiling IP RATING: IP65 Ø117mm/4-5/8" **CUT OUT HOLE: BATHROOM ZONE:** Zone 1, 2, 3

RECESS DEPTH: 187 (mm) VOLTAGE: Constant Current 350 (mA) FIRE RATING: 90 min PRODUCT F MARK: Suitable for mounting on

LAMP

LIGHT SOURCE: COB LED MACADAM ELLIPSE: 3-Step 12.7W MAXIMUM WATTAGE: UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 25.6 (Degrees) LAMP INCLUDED? TILT ADJUSTMENT ANGLE: Yes (Integral) Not Applicable **LUMINOUS FLUX:** 1219 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 2700 (K) To Be Advised CRI: 80 L70: >36,300 (Hrs)

ELECTRICAL

R9:

SWITCHED: SUPPLY FREQUENCY: No Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable **EFFICACY:** 98.31 (lm/W) DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED?

ADDITIONAL INFORMATION

12.0

Not Applicable


CE




BOX QUANTITY x8

Not applicable

flammable materials

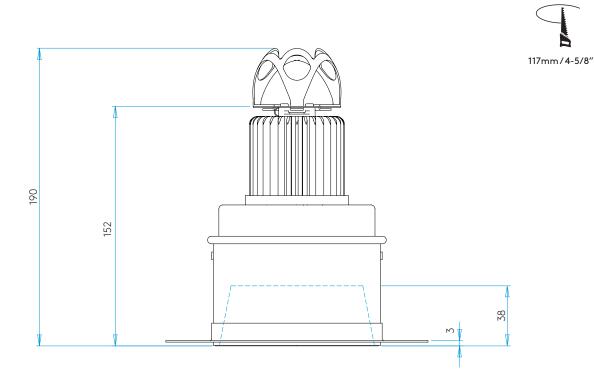

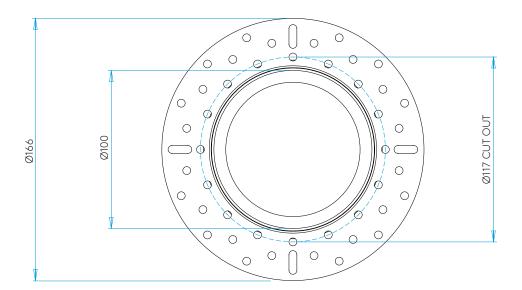

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com