
TRIMLESS SQUARE ADJ LED 5699

astro





PRODUCT SPECIFICATION

GENERAL

FINISH: Textured White CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Zinc **GROSS WEIGHT:** 0.41 (Kg) H: 80mm W: 93mm D: 93mm **DIMENSIONS:** CE (Class III) CLASS: INSTALLATION ORIENTATION: Ceiling Mount - Install into new ceiling IP RATING: IP20 L: 95mm W: 100mm **CUT OUT HOLE: BATHROOM ZONE:** Zone 3

RECESS DEPTH: 150 (mm) VOLTAGE: Constant Current 700 (mA)

FIRE RATING: Not Applicable PRODUCT F MARK: Not suitable for covering with thermal insulation

LAMP

LIGHT SOURCE: COB LED MACADAM ELIPSE: 3-Step MAXIMUM WATTAGE: 6.8W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** To Be Advised LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: 30 (Degrees) **LUMINOUS FLUX:** 543.57 (lm) ROTATION ADJUSTMENT ANGLE: 360 (Degrees) **COLOUR TEMP:** 2700 (K) AVERAGE LIFESPAN: 36,300 (Hrs) CRI: 80 L70: To Be Advised

ELECTRICAL

R9:

SWITCHED: No SUPPLY FREQUENCY: Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable **EFFICACY:** 59.08 (Im/W)

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? No

ADDITIONAL INFORMATION

✓ BOX QUANTITY x 30

✓ B





Product tested with 1836 - LED Driver CC 250/350/500/700mA DALI Dim

4.4

Œ



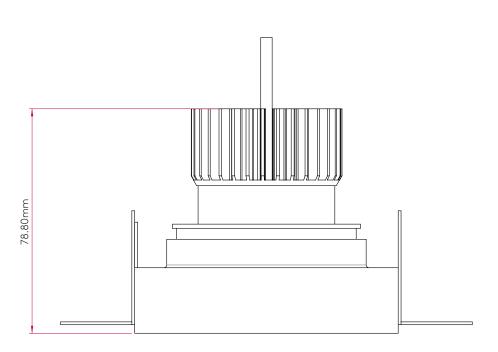

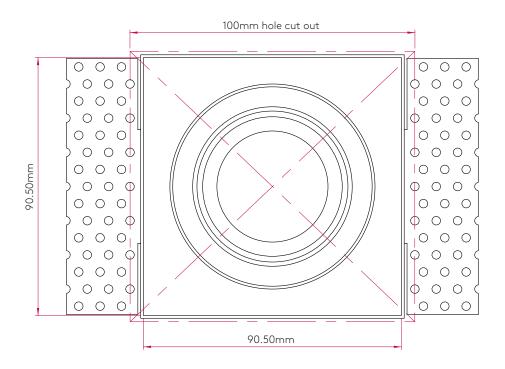

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com