

GOYA LED 460 **0874** sku 1115008

astro





PRODUCT SPECIFICATION


GENERAL


FINISH:	Polished Chrome	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Mild Steel	GROSS WEIGHT:	0.81 (kg)
DIMENSIONS:	H:50mm W:460mm D:210mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Horizontal	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230 (V)
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials
LAMP			
LIGHT SOURCE:	Mid-Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	5W	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	90 (Degrees)
LUMINOUS FLUX:	431.1 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	30,000
CRI:	70	L70:	To Be Advised
R9:	-0.8		
ELECTRICAL			
SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	100-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30,000 (hrs)
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	60.72 (lm/W)
DRIVER OUTPUT VOLTAGE:	12 (V)	DRIVER/BALLAST INCLUDED?	Yes (Integral)
ADDITIONAL INFOR	MATION		(6



BOX QUANTITY X12


PRODUCT ELEVATIONS

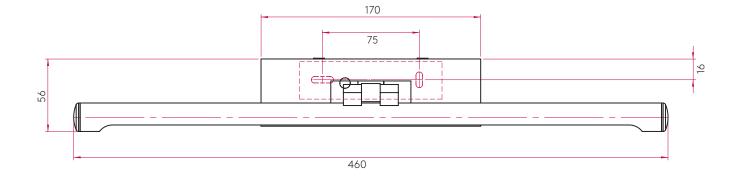



T: +44 (0) 1279 427001

F: +44 (0) 1279 427002

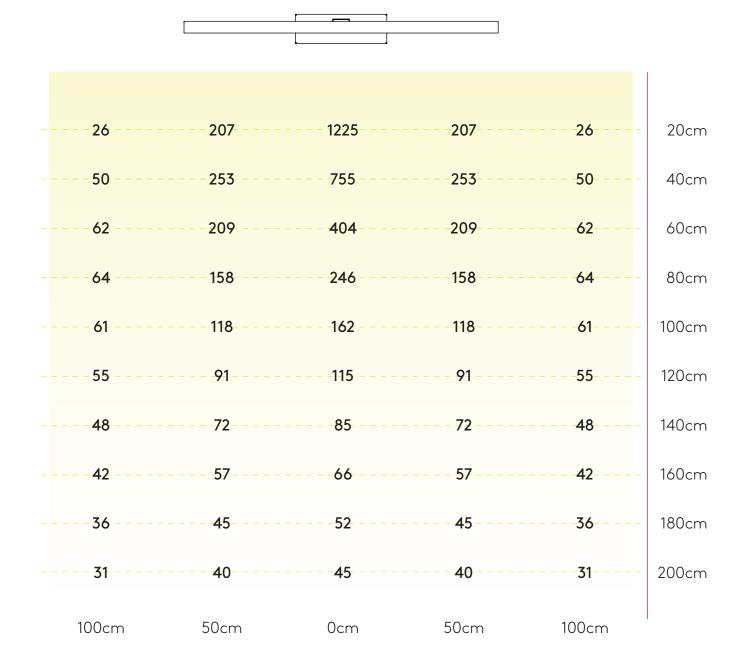

ADDITIONAL INFORMATION

CE

All products tested were mounted 2m from the floor and adjustable heads set perpendicular to the ground. Results were obtained using a handheld lumen meter, measurements given are in Lux. Please note: Graphical representation of the product is not to scale.