BEAM ONE **0937** SKU 1202001

astro



PRODUCT SPECIFICATION

GENERAL

FINISH: Painted Silver CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Aluminium **GROSS WEIGHT:** 0.33 (kg) Ø:60mm D:90mm DIMENSIONS: CLASS: CE (Class III) INSTALLATION ORIENTATION: Ground/Floor/Wall Mount IP RATING: IP67 40mm/1-9/16" **CUT OUT HOLE: BATHROOM ZONE:** Zones 1, 2, 3

RECESS DEPTH: 90mm/3.54" VOLTAGE: Constant Current 700mA FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: High Power LED MACADAM ELIPSE: To Be Advised MAXIMUM WATTAGE: 3W Max UGR: Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 7 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) 60,500 (hrs) CRI: L70: To Be Advised

R9: To Be Advised

ELECTRICAL

SWITCHED: SUPPLY FREQUENCY: No Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependent DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable EFFICACY: To Be Advised

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? No

ADDITIONAL INFORMATION


BOX QUANTITY X 50

(1)

1000 HOURS SALT-SPRAY TESTED



Œ

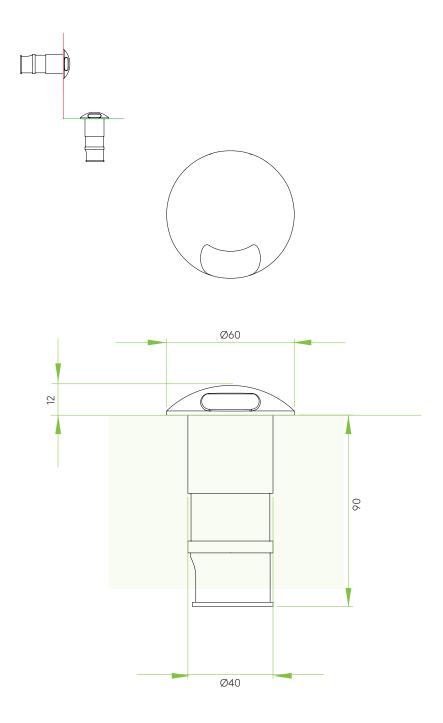

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com