
OSLO 160 7494 SKU 1298006

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	White	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Aluminium	GROSS WEIGHT:	0.9 (kg)
DIMENSIONS:	H:160mm W:70mm D:100mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Vertical	IP RATING:	IP65
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Not Applicable
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials
LAMP			
LIGHT SOURCE:	High Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	2 x 3W Max	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	99.37 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	3000 (K)	AVERAGE LIFESPAN:	To Be Advised
CRI:	80	L70:	To Be Advised
R9:	26.8		
ELECTRICAL			
SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	60,000 (Hrs)
DRIVER OUTPUT CURRENT:	700 (mA)	EFFICACY:	16.5 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	Yes (Integral)
ADDITIONAL INFORM	MAHON		





(1) 1000 HOURS SALT-SPRAY TESTED





BOX QUANTITY X6

PRODUCT ELEVATIONS



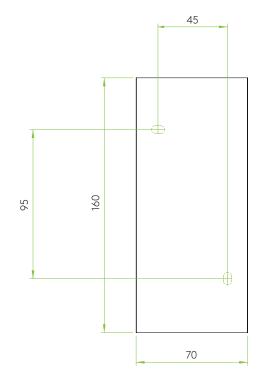





T: +44 (0) 1279 427001

F: +44 (0) 1279 427002

sales@astrolighting.com

www.astrolighting.com